

An Amazing New Automotive Finish Protection Film to keep your vehicle in showroom condition...



VentureShield™

Primarily for use on vulnerable leading surfaces, and areas of likely contact, such as hoods, edges of doors, bumpers, side mirrors, rocker panels and body contour projections

- Crystal clear, high gloss, non-yellowing urethane film
- Aggressive, weather resistant, ultra transparent, acrylic adhesive
- Clings tenaciously, yet removes cleanly, without residue, from fully cured paint surfaces
- Extremely flexible, to conform with no wrinkle or creep
- Fast, easy installation
- Superior anti-corrosion formulation
- Highly resistant to UV, oils and chemicals
- Feeds and cuts cleanly on computer controlled devices
- Virtually invisible, VentureShield does not alter the aesthetics of the vehicle or its factory finish

7510 (6 mil/150 micron),

7512 & 7514 (12 mil/300 micron)


Your best hope in the never-ending battle against stone chips, abrasion, insects and environmental damage, with twice the abrasion resistance of the leading competitive product!

VentureTape®

International Distribution Points:

Rockland, MA • Atlanta, GA • Houston, TX • Walnut, CA • Chicago, IL • Milwaukee, WI • Portland, OR • Montreal, QC • Australia • United Kingdom • Singapore • Netherlands

VentureShield™

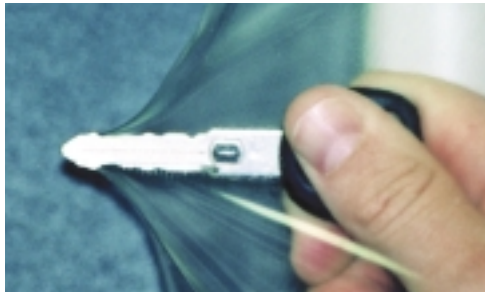

Extremely high puncture resistance



Optical clarity and high gloss

*You can't see it,
yet VentureShield™
is so tough it's used
for abrasion protection
on aircraft propellers
and rotors!*

Specifications:	7510	7512 & 7514
Substrate Thickness	6.0 mils (0.006") / 0.1524 mm (170μ)	12.0 mils (0.012") / 0.3048 mm (340μ)
Adhesive Thickness	2.0 mils (0.002") / 0.0787 mm (50 gsm)	2.5 mils (0.0025") / 0.0984 mm (62.5 gsm)
Peel Adhesion (PSTC-1)	25 oz / inch width / 16.3 N / 25 mm	65 oz / inch width / 43 N / 25 mm
Shear adhesion (PSTC-7)	Indefinite @ 2.2 psi / 15.2 kPa	
Tensile (PSTC-31)	56 lb / inch width / 253 N (31 kg) / 25 mm	112 lb / inch width / 506 N (31 kg) / 25 mm
Elongation at Break	370%	410%
Puncture Resistance (ASTM D - 1000)	18 kg	36 kg
Release Liner	Polycoated Bleached Kraft: 90 lb per ream / 148 gsm	
Maximum Temperature Continuous Use	212 °F / 100 °C	
Minimum Application Temperature	-10 °F / - 23 °C	
Chemical Resistance	Excellent	
UV Resistance	100% up to 10 Years	

Available Size:
Width up to 48 inches / 122 cm,
on 3 inch / 75 mm core

VentureTape®

Venture Tape Corp.
30 Commerce Road
Rockland, Massachusetts
02370 U.S.A.
Tel 781-331-5900
800-343-1076 (U.S.A.)
800-544-1024 (Canada)
Fax 781-871-0065
www.venturetape.com
sales@venturetape.com

Venture Tape
Europe Corp. 
Units 5/6, Faraday Close
Drayton Fields, Daventry
Northants, England
NN11 5RD
Tel +44 (0) 1327 876555
Fax +44 (0) 1327 876444
Toll Free from U.K.
800-962-957

Venture Tape
Australasia, Pty. Ltd.
90A Northgate Drive
Thomastown 3074
Victoria, Australia
Tel 61 3 9464 2089
Fax 61 3 9464 7268
Toll Free from Australia
800 122-797

Toll Free to U.S.A. from: Germany 0131 822178, Belgium 0 800 1-5625,
Netherlands 0800-022-2038, Singapore 800-1100695, Mexico 800-343-1076

Limited Warranty

PRODUCTS SOLD BY VENTURE TAPE CORP. ARE WARRANTED UPON DELIVERY TO BE OF THE QUALITY SET FORTH IN THE SPECIFICATIONS. VENTURE TAPE CORP. MAKES NO OTHER REPRESENTATIONS OR WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Should a product sold by Venture Tape Corp. not be as warranted, Venture Tape Corp.'s sole obligation shall be, at its sole option, to repair, correct or replace the products, or, at Venture Tape Corp.'s sole discretion, to refund amounts paid for such product upon its return to a location designated by Venture Tape Corp. No product may be returned to Venture Tape Corp. without prior written approval. Any return must be shipped within 14 days of delivery. Venture Tape Corp. shall in no event have any responsibility for any damages beyond the cost of the product, either for labor, expense or other damages of any sort including special, incidental or consequential damages incurred by the buyer or user. Determination of the suitability of the product to its application and product installation are solely the responsibility of the buyer.

For free sample:
800-343-1076

Visit our web site:
www.venturetape.com

E-mail:
ventureshield@venturetape.com